

YLM
G/G
60CL




19.9%
CELL EFFICIENCY

10 YEAR
PRODUCT WARRANTY

0-5W
POWER TOLERANCE

30 Year Linear Warranty

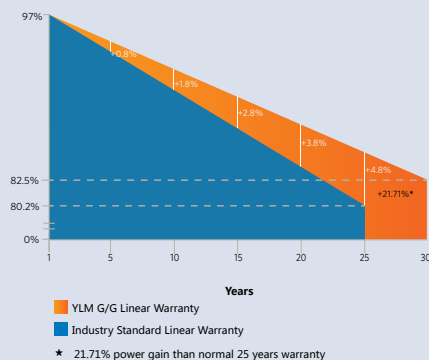

DOUBLED STRENGTH FOR MULTIPLIED RELIABILITY

Whenever the conditions are requiring a more robust solution, our PV modules are the right choice. Carefully chosen materials, state of the art solar cells and our experience in manufacturing ensure in addition the high product quality.

+ $\frac{W}{m^2}$ High Power Density
High efficiency, monocrystalline silicon cells with high transmission and textured glass could minimize installation costs and maximize kWh output of your system per unit area.

Durability
Durable PV modules, independently tested for harsh environmental conditions such as exposure to salt mist, ammonia or known PID risk factors.

PID Resistant
Tested in accordance to the standard IEC 62804, our PV modules have demonstrated resistance against PID (Potential Induced Degradation), which translates to security for your investment.

Optimal Self-cleaning
Optimal self-cleaning due to frameless module design.

Yingli Green Energy

Yingli Green Energy Holding Company Limited, known as "Yingli Solar", is one of the world's leading solar panel manufacturers with the mission to provide affordable green energy for all. Yingli Solar makes solar power possible for communities everywhere by using our global manufacturing and logistics expertise to address unique local challenges.

YLM G/G 60CL

Electrical Performance

Electrical parameters at Standard Test Conditions (STC)								
Module type	YLxxxDG2530L-1 (xxx=Pmax)							
Power output	P_{max}	W	300	295	290	285	280	275
Power output tolerances	ΔP_{max}	W	0 / + 5					
Module efficiency	η_m	%	18.2	17.9	17.6	17.3	17.0	16.7
Voltage at P_{max}	V_{mpp}	V	33.2	32.9	32.6	32.3	32.0	31.7
Current at P_{max}	I_{mpp}	A	9.04	8.97	8.90	8.83	8.77	8.70
Open-circuit voltage	V_{oc}	V	39.3	39.1	38.9	38.7	38.5	38.3
Short-circuit current	I_{sc}	A	9.50	9.45	9.40	9.35	9.30	9.25

STC: 1000W/m² irradiance, 25°C module temperature, AM1.5g spectrum according to EN 60904-3.
Average relative efficiency reduction of 3.0% at 200W/m² according to EN 60904-1.

Electrical parameters at Nominal Module Operating Temperature (NMOT)								
Power output	P_{max}	W	225.9	222.1	218.4	214.6	210.8	207.1
Voltage at P_{max}	V_{mpp}	V	31.2	31.0	30.7	30.4	30.0	29.8
Current at P_{max}	I_{mpp}	A	7.23	7.18	7.12	7.06	7.02	6.96
Open-circuit voltage	V_{oc}	V	37.2	37.0	36.8	36.6	36.4	36.2
Short-circuit current	I_{sc}	A	7.65	7.61	7.57	7.53	7.49	7.45

NMOT: temperature near maximum power point at 800W/m² irradiance, 20°C ambient temperature, 1m/s wind speed.

THERMAL CHARACTERISTICS

Nominal module operating temperature	NMOT	°C	39 +/- 2
Temperature coefficient of P_{max}	γ_{Pmax}	%/°C	-0.42
Temperature coefficient of V_{oc}	β_{Voc}	%/°C	-0.32
Temperature coefficient of I_{sc}	α_{Isc}	%/°C	0.05

OPERATING CONDITIONS

Max. system voltage	1500V _{DC}
Max. series fuse rating	15A
Limiting reverse current	15A
Operating temperature range	-40°C to 85°C
Max. snow load, front*	5400Pa
Max. wind load, back	2400Pa
Max. hailstone impact (diameter / velocity)	25mm / 23m/s

*Load bearing capacity depends on installation.

CONSTRUCTION MATERIALS

Front cover (material / thickness)	low-iron semi-tempered glass / 2.5mm×2
Cell (quantity / material / dimensions / number of busbars)	60 / monocrystalline silicon/ 156.75mm x 156.75mm (+/-0.25) / 4 or 5
Frame (material)	N / A
Junction box (protection degree)	≥ IP67
Cable (length / cross-sectional area)	200mm / 4mm ²
Plug connector (type / protection degree)	RH 05-8 / IP67 or LSC-R1 / IP68 or LSC-R4 / IP68

- Due to continuous innovation, research and product improvement, the specifications in this product information sheet are subject to change without prior notice. The specifications may deviate slightly and are not guaranteed.
- The data do not refer to a single module and they are not part of the offer, they only serve for comparison to different module types.

QUALIFICATIONS & CERTIFICATES

IEC 61215, IEC 61730, CE, ISO 9001:2008, ISO 14001:2004, BS OHSAS 18001:2007, SA 8000




GENERAL CHARACTERISTICS

Dimensions (L / W / H)	1658mm / 992mm / 6mm
Weight	23kg

PACKAGING SPECIFICATIONS

Number of modules per pallet	33
Number of pallets per 40' container	26
Packaging box dimensions (L / W / H)	1780mm / 1140mm / 1183mm
Pallet weight	822kg

Unit: mm

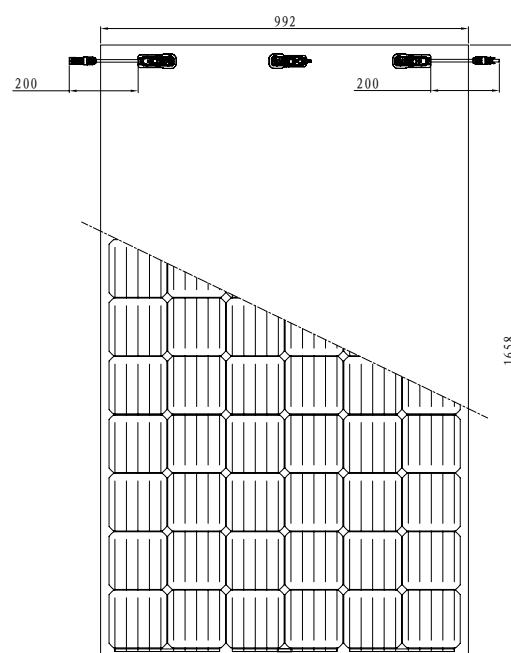

Warning: Read the Installation and User Manual in its entirety before handling, installing and operating Yingli Solar modules.

Yingli Partners:

Yingli Green Energy Holding Co., Ltd.

service@yingli.com

Tel: +86-312-2188055

YINGLISOLAR.COM

